

技术资料

## 5440A-7002 | 低热电势测试线（香蕉接头） 选件



### 产品概述: 5440A-7002 | 低热电势测试线（香蕉接头） 选件

These low thermal test leads have lower thermal emf than standard test leads, minimizing the emf caused by temperature difference between the ends of the leads.

Length: 24 in ± 1 in

Connector size: 4 mm diameter

Connector style: Safety type, with a retractable spring-loaded hood. The connector engages with a wiping action.


Thermal EMF: Less than 1.3  $\mu\text{V}$  per  $^{\circ}\text{C}$  when measured while engaged in a five-way binding post of Tellurium Copper Alloy, 145, half hard.

Leakage Resistance between Center Conductor and Shield: Greater than  $1.0 \times 10^{13} \Omega$  at 45  $^{\circ}\text{C}$  and 75 % R.H.

Cable type: RG-58/U type with AWG20 stranded and tinned center conductor (19 x .0071 in) (Belden 8262 or equivalent)

Safety ratings: Designed to meet UL 1244 to 1100 V ac

## 型号

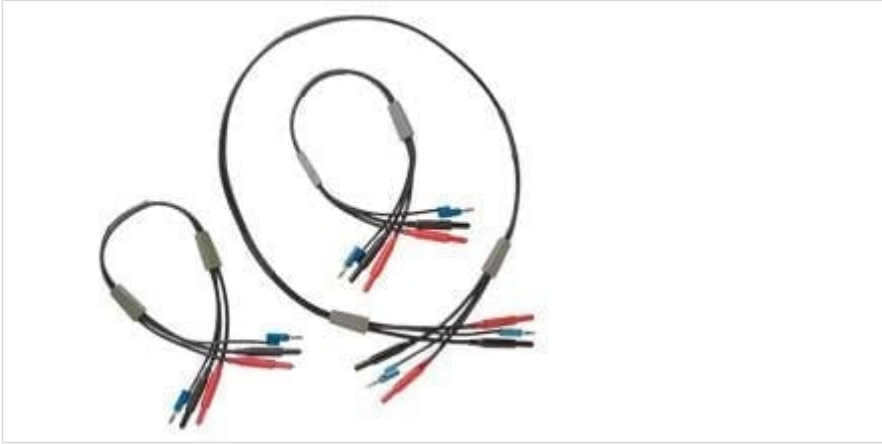

5440A-7002

低热电势测试线（香蕉接头） 选件

---

Fluke. 让您的工作畅通无阻。

福禄克测试仪器（上海）有限公司 电话：400-810-3435 ©2025 福禄克公司  
04/2025

北京福禄克世禄仪器维修和服务有限公司 电  
话：400-615-1563

未经许可，本文档禁止修改

福禄克测试仪器（上海）有限公司上海维修中心 电  
话：021-54402301, 021-54401908分机269

福禄克测试仪器（上海）有限公司深圳第一特约维修点  
电话：0755-86337229